



深圳市拓航创新科技有限公司
SHENZHEN TOP-MOTOR TECHNOLOGY CO., LTD

规格书 (SPECIFICATION)

SPEC. No. (编号): TH2812-KV1150

Issuing Date(日期): 2024.05.15

Customer(客户): 008-Monster Unit

Product Name(产品名称): 2812-04刷电机

Model(型号): TH2812-04

Part No. (编号): 24.05.15.240.001

Notes(备注): _____

Customer acknowledged by:

(客户确认签字)

Prepared By(制表):	Checked By(审核):	Approved By(批准):
骆嘉俊	张建	严超

TH2812-04规格标准 Specification

外观要求 Appearance

Item	项目 Content	要 求 Standard	备注 Remark
1	电机直径 Motor-D(mm)	$\Phi 33.2 \pm 0.1\text{mm}$	Shipping QC
2	电机长度 Motor-L(mm)	$27.3 \pm 0.3\text{mm}$	Shipping QC
3	轴直径 Shaft-D(mm)	$\Phi 5 -0/-0.02\text{mm}$	Shipping QC
4	出轴长度 Shaft-L(mm)	$15.5 \pm 0.2\text{mm}$	Shipping QC
5	线长 Wire Length(mm)	$260 \pm 5\text{mm}$	Shipping QC
6	出线颜色 Wile Color	黑色 Black	Shipping QC
7	重量 Weight(g)	$74.8 \pm 2\text{g}$ (含线 With wire)	Random QC
8	插头 Connector (mm)	无 N/A	Shipping QC
9	轴向间隙 (虚位) Axial clearance	0mm	Shipping QC

性能要求 Performance Standard




Item	项 目 Content		要 求 Standards	备注 Remark
1	空载 No Load	电压 (V)	10V	AM32 ESC
		电流 (A)	$1 \pm 0.2\text{A}$	Shipping QC
		转速 (RPM)	10925~12075RPM (1150KV)	Shipping QC
2	成品有线内阻 Internal resistance (m Ω)		$57\text{m}\Omega \pm 5\%$	Shipping QC
3	高压测试 High Voltage Testing		AC500V 1mA 2 秒	Shipping QC
4	转子外壳跳动 Rotor Housing Beating		$\leq 0.1\text{mm}$	Production Random QC
5	动平衡测试(转子) Rotor Dynamic Testing		$\leq 3\text{mg}$	Production Random QC
6	转向(轴伸端视) Rotating Direction		全方向 (统一测试接线) Full Direction	Shipping QC

7	高温储存测试 High temperature test	60℃保持 100 小时, 室温 24 小时后电机能正常工作 60℃ for 100 hours, and the motor works normally after room temperature for 24 hours	Production Random QC
9	低温储存测试 Low temperature storage test	-20℃保持 100 小时, 室温 24 小时后电机能正常工作 -20℃ for 100 hours, and the motor can work normally after room temperature for 24 hours	Production Random QC
10	最大功率 Max Power	1610.5W	
11	使用电压范围 Working Voltage	4-6S (按锂电 3.7-4.2V/S 计算)	Constant Power
12	使用环境 Working environment	温度 Temperature:-20~60℃、湿度 Humidity:10~90%RH	Normal temperature and humidity

负载数据

型号	桨叶	油门值 (%)	电压 (V)	负载电流 (A)	拉力 (g)	功率 (W)	效率 (g/W)	温度 (° C)
2812-04 1150KV	8*4*3	50%	23.90	9.61	970	229.7	4.2	77℃
		60%	23.89	15.12	1355	361.2	3.8	
		70%	23.82	22.27	1787	530.5	3.4	
		80%	23.73	31.06	2191	737.1	3.0	
		90%	23.62	41.57	2629	981.9	2.7	
		100%	23.46	53.20	3027	1248.1	2.4	
型号	桨叶	油门值 (%)	电压 (V)	负载电流 (A)	拉力 (g)	功率 (W)	效率 (g/W)	温度 (° C)
2812-04 1150KV	8*4.5*3	50%	23.93	13.64	1234	326.4	3.8	122℃
		60%	23.88	21.03	1641	502.2	3.3	
		70%	23.71	30.64	2094	726.5	2.9	
		80%	23.68	42.35	2536	1002.8	2.5	
		90%	23.49	55.48	2920	1303.2	2.2	
		100%	23.30	69.12	3241	1610.5	2.0	
型号	桨叶	油门值 (%)	电压 (V)	负载电流 (A)	拉力 (g)	功率 (W)	效率 (g/W)	温度 (° C)
2812-04 1150KV	9*4*3	50%	23.99	12.90	1282	309.5	4.1	100℃
		60%	23.79	20.19	1745	480.3	3.6	
		70%	23.71	28.99	2224	687.4	3.2	
		80%	23.64	39.51	2731	934.0	2.9	
		90%	23.49	52.24	3174	1227.1	2.6	
		100%	23.38	65.29	3571	1526.5	2.3	

外形图

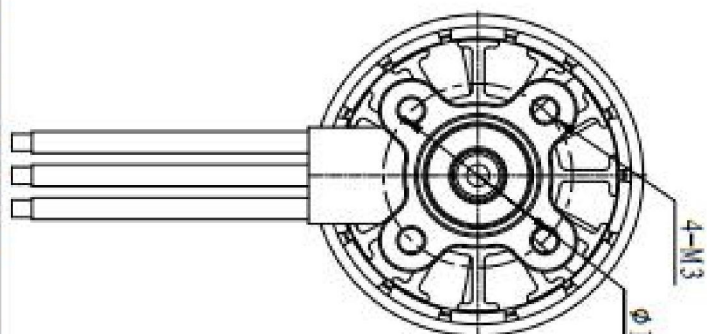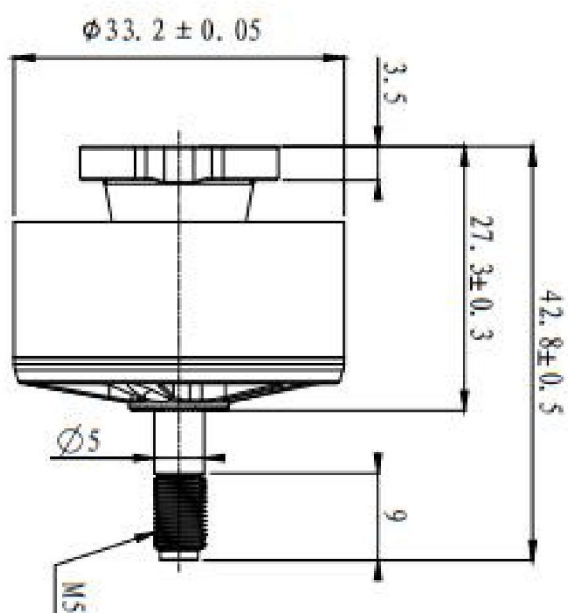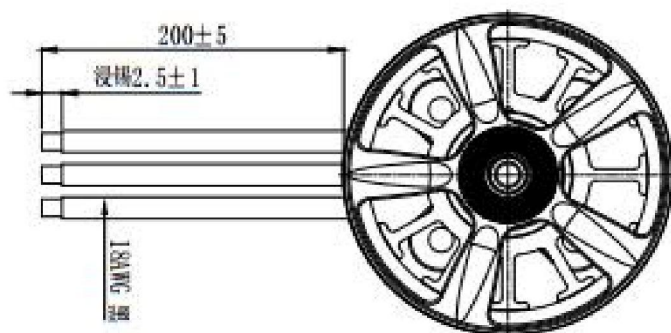

6	7	8
姓名	修習内容	签名
①		xxx/xx/xx
②		xxx/xx/xx

2012-04-04 11:17:02, 1mg, 1.0mg			深圳市拓航创新科技有限公司		
SHENZHEN TOP-MOTOR TECHNOLOGY CO., LTD			深圳市拓航创新科技有限公司		
零件名称	外形图	型号	2812-04	版本	V0
材料		单位	mm	核准	
表面处理		比例	1:500	检查	
重量		图幅	A4	绘图	张建
投影视角	 	绘图员		绘图日期	2012-04-10
		备注			

Product Notes

Safety advice

- (1) Check your personnel whether the propeller or parts are properly installed and fastened before each use.
 - (2) When using your personnel, do not stay close to the rotating propeller and motor rotating parts to avoid human damage.
 - (3) The motor contains precision parts such as bearings and magnetic materials. When used and stored by your company, it needs to be effectively controlled to prevent foreign body adsorption into the motor, resulting in adverse conditions such as motor jamming or blocking.
 - (4) The motor should be used under normal rated conditions. Do not overload it.
 - (5) Due to the influence of multiple conditions such as service voltage use load and service environment, it may cause short circuit, fire and smoke of the product. So in your company's products, please take appropriate protection measures.
 - (6) For the installation of the motor, please select a screw of the appropriate length to prevent a long overhead damage to the internal coil. During your wiring operation, please be careful not to touch the bare leakage coil or wire edge of the motor. If not, it may cause electric shock, fire and fire.
- matters need attention
- (1) This product is based on the installation of other machines and equipment. Therefore, this product does not indicate a warning mark, if necessary, please contact.
 - (2) Temperature has a great impact on product life, so when installed on your products, the worst condition is set below the allowable temperature of the bearing (maximum 80°C). (If not determined, confirm the life installed on your product.)
 - (3) Do not allow the motor to work at high temperature. If the high temperature (upper limit temperature 80°C) continues, due to the deterioration of the bearing, it will cause noise, vibration and other bad, and affect the overall life of the motor.
 - (4) Your company shall control the performance of the motor in its own driving mode, and confirm the occurrence of abnormal noise, abnormal heating, voltage voltage range, load fluctuation and other changes.
 - (5) Use the motor on your products, please install it in the correct way. Improper installation method is the root cause of noise and vibration, and will also cause adverse effects to the internal components of the motor.
 - (6) Do not directly carry the wire and shaft of the motor to move the motor position to avoid abnormal force damage to the motor.
 - (7) When the motor falls or is impacted by a large external force, it will cause internal insulation and poor bearing, so do not use it directly.
 - (8) Do not break down this product. If decomposed by itself, its safety performance and other performance will not be guaranteed.
 - (9) Please do not use this product in harmful environments with corrosive gases (H₂O, SO₂, NO₂, CL₂) and substances with harmful gases (especially silicone series, cyanide series, phenol series). In addition, you should confirm in advance whether the above substances are present in your products, if present, may cause rust and life impact.
 - (10) Motor storage environment: -20°C ~60°C, conventional humidity 10% ~ 90% RH (no condensation), dry ventilation without corrosive gas and harmful environment in the warehouse, the storage time is not more than 6 months (do not affect the quality of the motor).
 - (11) Motor operating environment: 0°C ~60°C, conventional humidity 10% ~ 90% RH (no condensation), altitude not exceeding 1500m (or atmospheric pressure 86-106Pa). There is no serious corrosive gas around the motor and affect the electrical insulation performance of the medium.
 - (12) When the motor uses 300H, the motor should be maintained, maintained or replaced to ensure the normal operation of the motor.
 - (13) The motor lead is patent leather wire. If your company needs to cut it, please peel and soak tin and use it.

Responsibility statement

(1) Please confirm the structure, size, life, noise, vibration and characteristics of the motor and your machinery and equipment body.

(2) The company will not guarantee the performance and quality of the motor if the use conditions are beyond the specifications specified in this specification.

(3) For changes of your product specifications or use on other products, please contact and re-check the parameter requirements in advance.

(4) If the specification of this product is changed, the reasonable change will be made according to the specification of the company or the documents proposed by your company. If the product performance, characteristics and other conditions are affected, the sample will be tried again and the specification will be changed after reasonable verification by both parties.

(5) In order to improve the performance of the product, it is possible to change one or more parts within the scope specified in this specification.

(6) For matters not recorded in this specification, if it is necessary to agree on matters, please contact in advance, and both parties should make reasonable changes after negotiation.

(7) In case of any mismatches, it shall be settled and implemented after negotiation in accordance with the items recorded in this specification.

(8) The specification described by the company has legitimate rights and interests and single customer characteristics. Please use the internal transmission, and do not disclose this specification to the third party.